



XT-3305 Encrypted L2 Tunnel via L3 UDP or TCP Transport

DESCRIPTION

The XT-3305 is a compact, device (Internet Appliance) that tunnels layer 2 Ethernet over Layer 3 transport. The tunnel can be encrypted with AES or non-encrypted. The XT-3305 features five Ethernet LAN ports each of which can be configured in software as trusted or untrusted ports.

The XT-3305 encrypts data between private networks using the public Internet or any other network as the transport. This creates a flat, bridged network, a private network within public or private networks.

Each XT-3305 can be a client, server, or both simultaneously. As a server, the XT-3305 supports up to 8 client devices. As a client, it can be used in conjunction with other XT models that support 50 to 128 client device locations.

The XT series uses AES encryption. AES is the US Government standard.

The XT-3305 network interfaces are five physical gigabit Ethernet ports that can be individually configured as one of three soft LAN ports, either trusted or untrusted. This provides installation flexibility. The XT-3306 has external 12, 24 and 48 volt options.

The XT series operates through firewalls with only one UDP or TCP port of your choice opened. The XT can be configured to also use a second port for redundancy. The XT bridges all Ethernet protocols including IPX, IP, NetBEUI, and other proprietary protocols. The XT series is straight-forward, easy to configure and maintain. The XT series has state-of-the-art AES encryption security without the configuration complexity of VPN.

Applications for the XT Series

- Tunnel IPv6 through IPv4 networks
- Tunnel Multicast through Unicast network
- Gas and oil production, pipelines
- Law Enforcement, Medical (HIPAA)
More security to sensitive locations within a corporate network
- Transport sensitive data through hostile environments



FEATURES

- **Ideal for voice and video tunneling applications**
- **Tunnels multicast and all other Ethernet protocols through routed IP networks**
- **XT-3305 temperature range of -10 to +45 C**
- **Native 9-30 VDC (12 volt nominal) with 120 VAC adapter included, other power options**
- **Optional 48 VDC, 125VDC and 240 AC power**
- **Supports TCP or UDP transport protocols**
- **10/100/1000 Base-T Ethernet MDI/MDIX**
- **5 “soft” ports that can be configured as trusted or untrusted interfaces**
- **AES 128, 192 or 256 bit encryption**
- **POE input and output option**
- **Easy to use configuration web interface**
- **Client mode, Server mode or Client & Server**
- **Server unit supports up to 8 remote clients**
- **Extensive logging and diagnostic tools**
- **Creates the equivalent of wide area Ethernet Switch (layer 2 network)**
- **Bridges 802.1Q tagged V-LAN trunks**
- **Extensive filtering on MAC, IP, and Protocols, NAT friendly**

XT-3305 Encrypted Ethernet Tunnel

SPECIFICATIONS

General

- Five 10/100/1000 BaseT, MDI/MDIX ethernet ports
- Each port can be configured as one of three soft trusted or untrusted interfaces
- Sustained throughput up to 20 Mbps with AES encryption mode
- Several thousand PPS throughput, depending upon packet size
- Up to 8 clients
- MAC bridging table supports 2,048 entries
- Traverses firewalls through any single port, port 22 is the default port
- Communicates with all XT, UT, and ET series products from DCB.
- Top LEDs for LAN connection and LAN activity for each port

Protocol Features


- AES 128, 192, or 256 bit encryption
- Dynamic DNS support.
- Web browser configuration and management from local trusted interface or through remote tunnel
- Default IP address: 192.168.0.1
- NAT friendly
- Works with UT-SOFT software client

Physical/Electrical:

- Native 9 to 30 VDC, 12 volts nominal, 10 watts
- 48, 125 VDC and 240 VAC options are available
- Supplied with 120 VAC, 19 watt external supply
- 110 mm, 4.33" W x 75mm, 2.95" D x 24mm, 0.95"
- One half pound

Environmental

- Operating Temp: -10 to +45 C
- Storage Temperature: -50 to +85 C
- Humidity: <95% Non-condensing

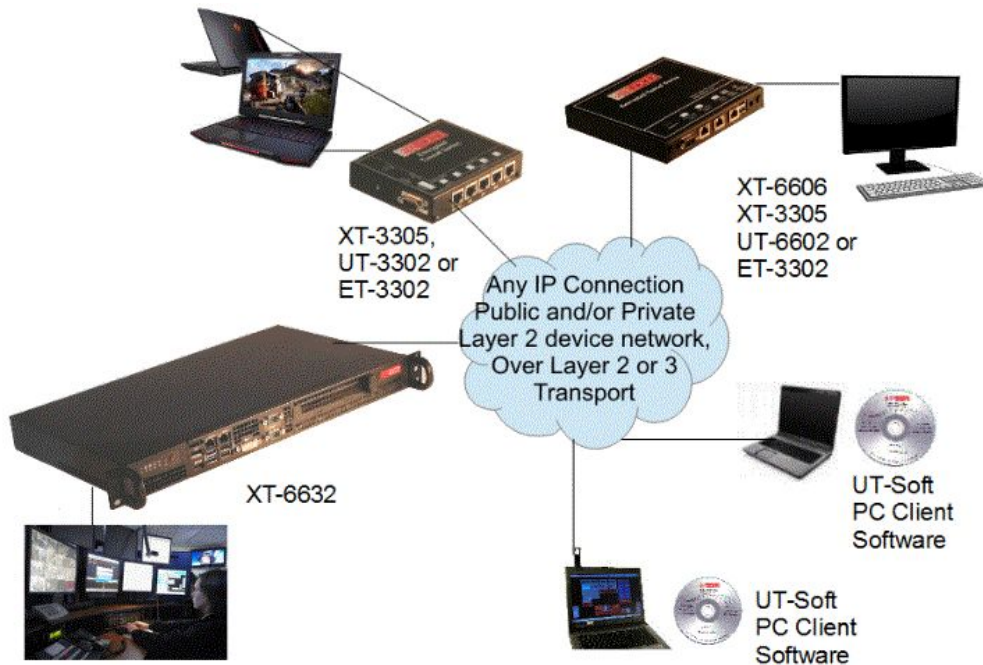

Data Comm for Business, Inc.

2949 CR 1000 E

Dewey, IL 61840

Voice 8004DCBNET

(800.432.2638)

Fax 217.897.8023

Info www.dcbnet.com/contact.html





[Web www.dcbnet.com](http://www.dcbnet.com)